



SUPER RAMP available!
See back for details

Delta

210GN



10K Dually Gooseneck Trailer



Pintle Hitch Models Available



DELTA TRAILERS • 1-800-556-2283 • www.deltatrailers.com



210GN

10K DUALY GOOSENECK TRAILER


S P E C I F I C A T I O N S

G.V.W.R	23,400#
COUPLER	2 5/16" E-Z Adjustable Coupler
AXLES SUSPENSION TIRE	Tandem 10,000# Dual Wheel (Oil-Bath) Multi-leaf Slipper Spring with Equalizer
WHEEL	ST235/80R16 (10 ply)
FRAME	16 x 6 Dual 8-bolt
NECK	12" I-Beam
CROSSMEMBERS	12" I-Beam
SAFETY CHAINS	3" Channel on 16" centers
JACK	3/8" Heavy Duty with Safety Latch Hooks
SIDE RAILS	12,000# Spring Loaded Drop Leg Jack
STAKE POCKETS	5" Angle Iron with Rub Rails
FLOOR	Formed Stake Pockets on 24" centers
LIGHTS	2" Pressure Treated Pine All LED Stop, Tail, Turn and Clearance

ELECTRIC PLUG	7-Way RV Style
PREP	3-Step Acid Washed with Phosphorus Solution
PRIMER	Rust Resistant Epoxy Primer
PAINT	High Solid Urethane
PINSTRIPES	Painted Pinstripes
OVERALL WIDTH	102" Wide (approx)
DECK HEIGHT	Approx. 38" Standard
BRAKES	Electric Brakes on All Axles
DOVE TAIL	Your Choice of 3 Different Dove Tail Styles
STEPS	Access Step on Driver's Sides
STORAGE	Chain Basket Between Uprights
WIRING	Front Mount in Conduit
REFLECTIVE TAPE	Required D.O.T. Reflective Taping
SAFETY	Emergency Breakaway Switch & Battery Backup All specifications subject to change without notice.

O P T I O N S

- Electric over Hydraulic Brakes
- Torque Tube (helps minimize trailer twisting)
- Disc Brakes (Includes 10K HD) (must add elec/hyd. brake)
- Pierced Beam (Low-Profile Trailer) includes diamond plate over tire area
- Dexter HD Adjustable Suspension (similar to Hutch)
- Spare Wheel
- Lid for Chain Basket
- Spare (Complete Tire & Wheel)
- Side Mount Toolbox with lid (18" x 14" x 36")
- Blackwood (rubber infused lumber) excellent traction
- Extra Spring Loaded Jack (Dual Jacks)
- Upgrade to 12", 22 lbs. I-Beam
- 2-Speed Jack System (includes 2nd Jack)
- Upgrade to 14-ply radial tires
- Convert to Electric Jack (ea.)
- Upgrade to 17.5 tires (each tire)
- Convert to Hydraulic Jack (ea.)
- Weld-on Ratchets
- 8' Slide-in Ramps (on Straight Deck trailer only - no dove tail)
- Ratchet Rail (per 6' length)
- Pipe Spools (between Stake Pockets)
- Steel Diamondplate over Ramp Backs (per ramp)
- Metal Floor (3/16" Diamondplate with crossmembers on 12" centers)
- Extra 10K axle

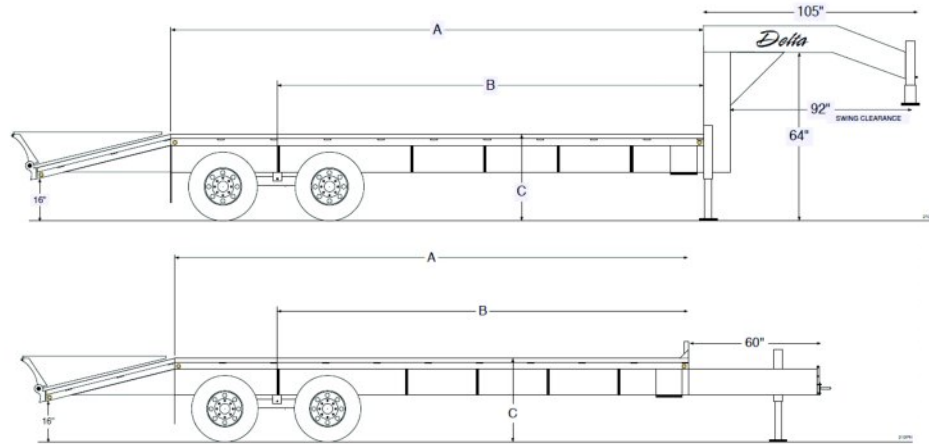

D O V E T A I L C H O I C E S

<i>Dove Tail</i>	<i>Type</i>	<i>Description</i>
DT 2	5' SELF-CLEANING includes 2 - 5' spring-assist Ramps with load-assist legs	Full dove tail constructed of angle iron N/C <i>Optional Center Ramp on Self-Cleaning Dove Tail</i>
DT 3	5' CENTER-LIFT includes 2 - 5' spring-assist Ramps with load-assist legs	Center platform raises automatically (with gas-pressure cylinder) so full dove tail is deck level when ramps are in stored position.
DTSR	SUPER RAMPS includes 2 - 5' extra wide spring-assist Ramps	2 - Extra Wide Ramps provide added versatility. Dual spring loaded for Super easy operation, includes diamond plate ramp deck
DT-S	STRAIGHT DECK	No dove tail, no ramps