

Delta

27GN



Tandem 7K Axle Gooseneck Trailer

Trailer Shown with Optional Second Jack and Enclosed Toolbox



Pintle Hitch Models Available

Delta

DELTA TRAILERS • 1-800-556-2283 • www.deltatrailers.com



27GN TANDEM 7K AXLE GOOSENECK TRAILER

S P E C I F I C A T I O N S


G.V.W.R.	14,000 #
COUPLER	2 5/16" E-Z Adjustable Coupler
AXLES SUSPENSION TIRE	Tandem 7,000# Single Wheel Multi-leaf Slipper Spring with Equalizer
WHEEL	ST235/80R16 (10 ply)
FRAME	16 x 6, 8-bolt
NECK	10" I-Beam (12# lbs./ft.)
CROSSMEMBERS	10" I-Beam (12# lbs./ft.)
SAFETY CHAINS	3" Channel on 16" Centers
JACK	3/8" Heavy Duty with Safety Latch Hooks
SIDE RAILS	12,000# Spring Loaded Drop Leg Jack
STAKE POCKETS	5" Angle Iron with Rub Rails
FLOOR	Formed Stake Pockets on 24" Centers
LIGHTS	2" Pressure Treated Pine All LED Stop, Tail, Turn and Clearance

ELECTRIC PLUG	7-Way RV Style
PREP	3-Step Acid Washed with Phosphorus Solution
PRIMER	Rust Resistant Epoxy Primer
PAINT	High Solid Urethane
PINSTripES	Painted Pinstripes
OVERALL WIDTH	102" Wide (approx)
DECK HEIGHT	Approx. 36" Standard
BRAKES	Electric Brakes on All Axles
DOVE TAIL	Your Choice of 3 Different Dove Tail Styles
STEPS	Access Step on Driver's Side
STORAGE	Chain Basket Between Uprights
WIRING	Front Mount in Conduit
REFLECTIVE TAPE	Required D.O.T. Reflective Taping
SAFETY	Emergency Breakaway Switch & Battery Backup <i>All specifications subject to change without notice.</i>

M E A S U R E M E N T S

Model	Length	A	B	C
27GN-20	20'	180"	150"	36"
27GN-22	22'	204"	162"	36"
27GN-24	24'	228"	174"	36"
27GN-25	25'	240"	186"	36"
27GN-26	26'	252"	198"	36"
27GN-28	28'	276"	224"	36"
27GN-30	30'	300"	240"	36"
27GN-32	32'	324"	256"	36"

All measurements are approximate

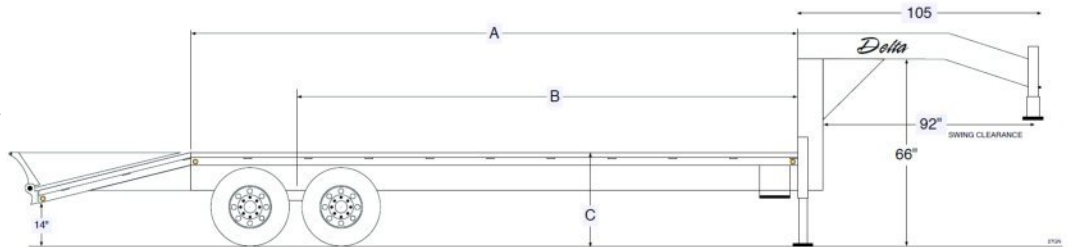

D O V E T A I L C H O I C E S

Dove Tail	Type	Description
DT 2	5' SELF-CLEANING includes 2 - 5' spring-assist Ramps with load-assist legs	Full dove tail constructed of angle iron N/C <i>Optional Center Ramp on Self-Cleaning Dove Tail</i>
DT 3	5' CENTER-LIFT includes 2 - 5' spring-assist Ramps with load-assist legs	Center platform raises automatically (with gas-pressure cylinder) so full dove tail is deck level when ramps are in stored position.
DTSR	SUPER RAMPS includes 2 - 5' extra wide spring-assist Ramps	2 - Extra Wide Ramps provide added versatility. Dual spring loaded for Super easy operation, includes diamond plate ramp deck
DT-S	STRAIGHT DECK	No dove tail, no ramps

O P T I O N S

- Upgrade Available to 2-8000# Axles in Gooseneck or Pintle Hitch (28GN or 28PH)
- Electric Over Hydraulic Brakes
- Metal Floor (3/16" Diamondplate with Crossmembers on 12")
- Lid for Chain Basket
- Spare (Complete Tire & Wheel)
- Side Mount Toolbox with Lid
- Upgrade to 14-ply Radial Tires
- Extra Spring Loaded Jack (Dual Jacks)
- Upgrade to 17.5 Tires
- 2-Speed Jack System (Includes 2nd Jack)
- Upgrade to Torflex Axles
- 8' Slide-in Ramps (On Straight Deck Trailer Only - No Dove Tail)
- Steel Diamondplate Over Ramp Backs (Per Ramp)
- Full Deck Over Gooseneck
- Pipe Spools (Between Stake Pockets)
- Blackwood (Rubber Infused Lumber) Excellent Traction
- Convert to 9' Hydraulic Dove Tail Trailer
- Convert to Gravity Tilt Deck (20' Section Tilts)